


BM8D

- Stainless steel shear beam load cell (150kg and 300kg are bending beam load cells)
- Hermetically sealed IP68
- Suitable for floor scales, vehicle-test line, hopper scales and other electronic weighing devices
- Wide range of capacities



Features

- Capacities: 1Klb~20Klb; 0.5t~10t
- High accuracy
- Low profile
- OIML Cert. No.: R60/2000-NL1-12.11
- NTEP Cert. No.: 10-056A2

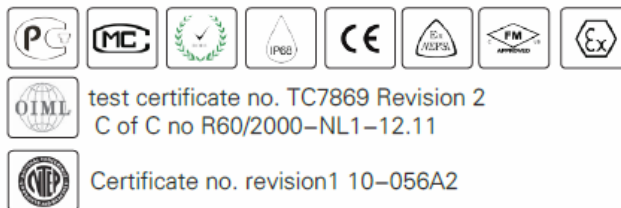

Specifications

Capacity	t	0.5/1/2/2.5/3/5/7.5/10	
	Klb	1/1.5/2/2.5/5/5KSE/7.5/10/15/20	
Accuracy		C3	N5
Maximum Number of Verification Intervals	Nmax	3000	5000
Minimum Number of Verification Intervals	Vmin	Emax/10000	Emax/5000
Output Sensitivity	(mV/V)	2.0±0.002	3.0±0.008
Input Resistance	(Ω)	350±3.5	
Output Resistance	(Ω)	350±3.5	
Insulation Resistance	(MΩ)	≥5000 (50VDC)	
Zero Balance	(%FS)	1	
Temperature, Compensated	(°C)	-10~+40	
Temperature, Operating	(°C)	-35~+70	
Excitation, Recommended	(V)	5~12 (DC)	
Excitation, Max	(V)	18 (DC)	
Safe Overload	(%FS)	150	
Ultimate Overload	(%FS)	300	


Cross Reference

Manufacturer	Model
HBM	H35

Accessories

- BJ-8-208
- BJ-8-209
- BJ-8-210
- BJ-8-211
- BJ-8-215
- BJ-8-219
- BJ-8-220
- HJ-8-213
- HJ-8-214


Dimensions in mm (in)

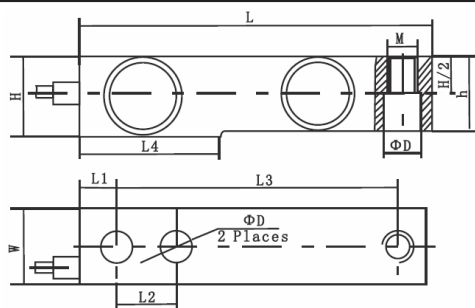

Outline Dimensions mm (inch)

Dimension (mm)	W	D	H	h	L	L1	L3	L3	L4	M
Capacity										
1Klb	30.7	13.5	30.2	24.76 (0.98)						
1.5Klb, 2Klb	(1.21)	(0.53)	(1.89)	26 (1.024)						
2.5Klb				27 (1.06)						
3Klb~5KlbSE				27.95 (1.10)						
0.5t	31.3	13.5	31.3	24.76 (0.98)	130	15.7	25.4 (1)	101.6	57.1	1/2-20UNF-2B
1t	(1.23)	(0.53)	(1.23)	26 (1.024)	(5.12)	(0.62)		(4)	(2.25)	
1.5t~2t				27.95 (1.10)						M12x1.75
5Klb~15Klb				27 (1.06)						
	36.8	19.8	36.8	27 (1.06)	171.5	19.1	38.1	133.3	76.2	3/4-16UNF-2B
	(1.45)	(0.779)	(1.45)		(6.75)	(0.748)	(1.5)	(5.25)	(3)	
2.5t~5t				31.95 (1.26)						M20x2.5
		20.5								
		(0.81)								
20Klb	49.5	26.9	49.5		222.2	25.4 (1)	50.8 (2)	171.5	101.6	1-12UNF-2B
7.5t~10t	(1.95)	(1.06)	(1.95)	40 (1.57)	(8.75)			(6.75)	(4)	M24x2

Wiring

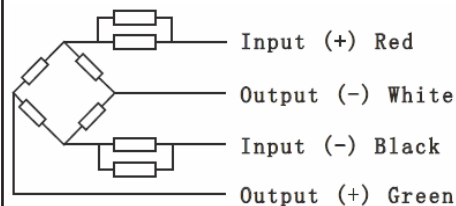

- Shielded, 4 conductor cable
- Cable diameter: 0.2in
- Standard cable length: 6m
- Shield not connected to element